

# SolisPanel 1500



## Technical specifications

- Wavelengths: 630nm:660nm:810nm:830nm:850nm:1060nm
- Housing & Dimensions: 868 × 252 × 65 mm (L×B×H)
- Weight: 11.5 kg
- Material: Metal & high-performance plastic
- Power supply: 100-240V-AC, 50/60Hz
- Total energy consumption: 500W
- Control functions: Touch screen & 1-click remote control


## Optical components

- LED-Type / amount: Dual-Chip LED-array / 300 LEDs
- Beam angle: 60 degrees
- Irradiance: 150mW / cm<sup>2</sup> at a distance of 8cm

## Control / Operation

- Control options: Touch display or 1-click remote control
- Timer function: Individually adjustable running time up to 30 minutes
- Intensity control: Adjustable from 0-100% for red and near-infrared light
- Frequency setting: Option to select your own frequency (Hz)

## Abdeckung

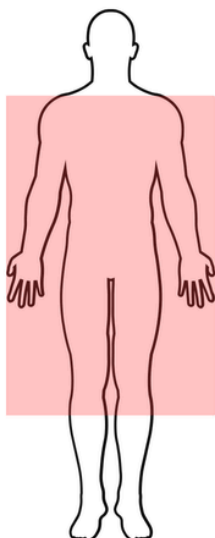

## Scope of delivery

- Device, safety glasses, remote control, power cord, mounting/fastening accessories, user manual

## Warranty & Support

- Warranty: 3 years on all SolisPanels
- Service: Direct support from Switzerland - with in-depth Swiss lighting and medical expertise for fast, competent support and sustainable solutions

