

# SolisPanel

## +



### Technical specifications

- Wavelengths: 630nm:660nm:810nm:830nm:850nm:1060nm
- Housing & Dimensions: 350 × 230 × 65 mm (L×B×H)
- Weight: 3.2 kg
- Material: Metal & high-performance plastic
- Power supply: 100-240V-AC, 50/60Hz
- Total energy consumption: 100W
- Control functions: Touch screen & 1-click remote control


### Optical components

- LED-Type / amount: Dual-Chip LED-array / 72 LEDs
- Beam angle: 60 degrees
- Irradiance: 130mW / cm<sup>2</sup> at a distance of 8cm

### Control / Operation

- Control options: Touch display, 1-click remote control
- Intensity control: adjustable from 0–100 % (total intensity)
- Wavelength control: each wavelength can be adjusted separately (0-100%) - enables individual spectral profiles and personalized treatment protocols
- Presets: multiple program memories for recurring protocols

### Coverage

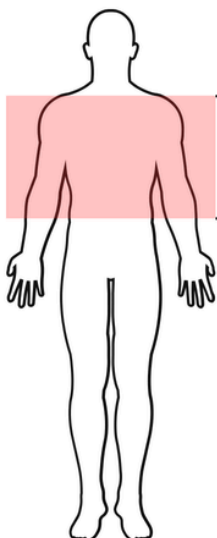

### Scope of delivery

- Device, safety glasses, remote control, power cord, user manual

### Warranty & Support

- Warranty: 3 years on all SolisPanels
- Service: Direct support from Switzerland - with in-depth Swiss lighting and medical expertise for fast, competent support and sustainable solutions

